


HX 系列鐵弗龍 Fluoropolymer 加熱器

具有卓越的耐化學腐蝕性 $10w/in^2(1.5w/cm^2)$

鐵弗龍加熱器優勢：


- 不銹鋼元件包覆厚壁 Fluoropolymer (PTFE) 為耐用的設計。
- 低功率密度設計佔用空間極小以確保長使用壽命。
- 內含溫度保護以提供安全操作。

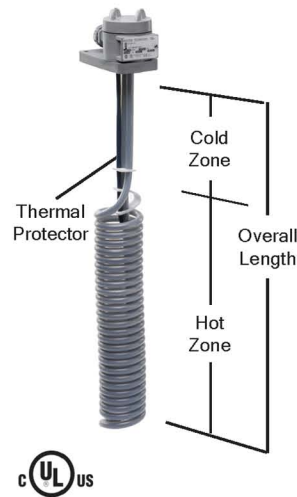

HX 系列單管螺旋鐵弗龍(PTFE)加熱器

| WATTS | VOLTS | HOT ZONE In./(mm) | OVERALL LENGTH In.(mm) | MAX. COLD ZONE In.(mm) | MODEL NUMBER | SHIP WGT. Lbs.(kg) |
|-------|-------|----------------------|------------------------------|------------------------------|-----------------|--------------------------|
| 500 | 120 | 5 | 11 | 41 | HX.5111-** | 6 |
| | 240 | (127) | (279) | (1041) | HX.5211-** | (2.7) |
| 1000 | 120 | 7 | 11 | 41 | HX1111-** | 7 |
| | 240 | (178) | (279) | (1041) | HX1211-** | (3.2) |
| 2000 | 120 | 12 | 17 | 40 | HX2117-** | 8 (3.6) |
| | 240 | (305) | (432) | (1016) | HX2217-** | |
| | 480 | | | | HX2417-** | |
| 3000 | 240 | 16 | 23 | 40 | HX3223-** | 13 |
| | 480 | (406) | (584) | (1016) | HX3423-** | (5.9) |
| 4000 | 240 | 20 | 29 | 40 | HX4229-** | 15 |
| | 480 | (508) | (737) | (1016) | HX4429-** | (6.8) |
| 5000 | 240 | 25 | 35 | 36 | HX5235-** | 18 |
| | 480 | (635) | (889) | (914) | HX5435-** | (8.2) |
| 6000 | 240 | 29 | 40 | 30 | HX6240-** | 21 |
| | 480 | (737) | (1016) | (762) | HX6440-** | (9.5) |
| 8000 | 240 | 37 | 47 | 32 | 2HX8247-** | 25 |
| | 480 | (940) | (1194) | (813) | 2HX8447-** | (11.3) |
| 9000 | 240 | 44 | 54 | 35 | 2HX9254-** | 28 |
| | 480 | (1118) | (1372) | (889) | 2HX9454-** | (12.7) |

HXL 系列 L 型單管螺旋鐵弗龍(PTFE)加熱器

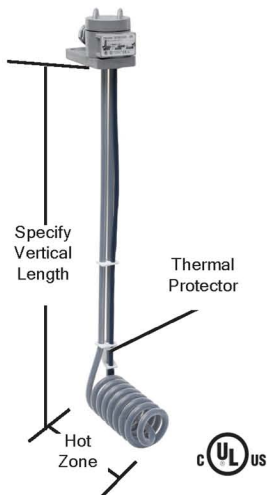

| WATTS | VOLTS | HOT ZONE In.(mm) | STD. VERT. LENGTH* In.(mm) | MAX. COLD ZONE In.(mm) | MODEL NUMBER | SHIP WGT. Lbs.(kg) |
|-------|-------|---------------------|----------------------------------|------------------------------|-----------------|--------------------------|
| 500 | 120 | 6 | 12 | 41 | HXL.5106-R*-** | 6 |
| | 240 | (152) | (305) | (1041) | HXL.5206-R*-** | (2.7) |
| 1000 | 120 | 8 | 12 | 41 | HXL1108-R*-** | 7 |
| | 240 | (203) | (305) | (1041) | HXL1208-R*-** | (3.2) |
| 2000 | 120 | 12 (305) | 18 (457) | 40 (1016) | HXL2112-R*-** | 8 (3.6) |
| | 240 | | | | HXL2212-R*-** | |
| | 480 | | | | HXL2412-R*-** | |
| 3000 | 240 | 17 | 18 | 40 | HXL3217-R*-** | 13 |
| | 480 | (432) | (457) | (1016) | HXL3417-R*-** | (5.9) |
| 4000 | 240 | 20 | 18 | 40 | HXL4220-R*-** | 15 |
| | 480 | (508) | (457) | (1016) | HXL4420-R*-** | (6.8) |
| 5000 | 240 | 24 | 18 | 36 | HXL5224-R*-** | 18 |
| | 480 | (610) | (457) | (914) | HXL5424-R*-** | (8.2) |
| 6000 | 240 | 29 | 18 | 30 | HXL6229-R*-** | 21 |
| | 480 | (737) | (457) | (762) | HXL6429-R*-** | (9.5) |
| 8000 | 240 | 37 | 18 | 32 | 2HXL8237-R*-** | 25 |
| | 480 | (940) | (457) | (813) | 2HXL8437-R*-** | (11.3) |
| 9000 | 240 | 44 | 18 | 35 | 2HXL9244-R*-** | 28 |
| | 480 | (1118) | (457) | (889) | 2HXL9444-R*-** | (12.7) |

集安電工有限公司 www.atapowtech.com

TEL: 886-3-3666021 FAX: 886-3-3626423