


# HXF 系列鐵弗龍 Fluoropolymer 加熱器

具有卓越的耐化學腐蝕性  $10\text{w}/\text{in}^2(1.5\text{w}/\text{cm}^2)$

## 鐵弗龍加熱器優勢：


- 不銹鋼元件包覆厚壁 Fluoropolymer (PTFE) 為耐用的設計。
- 低功率密度設計佔用空間極小以確保長使用壽命。
- 內含溫度保護以提供安全操作。

HXF 系列直立圓盤平面鐵弗龍(PTFE) 加熱器

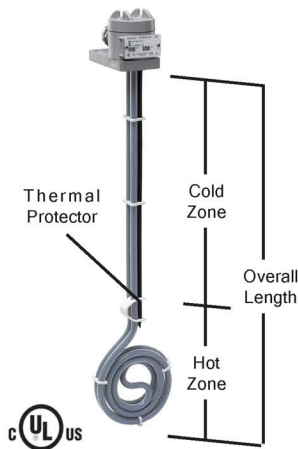

WATTS	VOLTS	HOT ZONE In.(mm)	OVERALL LENGTH In.(mm)	DIA. In.(mm)	MAX. COLD ZONE In.(mm)	MODEL NUMBER	SHIP WGT. Lbs.(kg)
500	120	6	14	5	36	HXF.5105-14-***	6
	240	(152)	(356)	(127)	(914)	HXF.5205-14-***	(2.7)
1000	120	7	14	6	36	HXF1106-14-***	7
	240	(178)	(356)	(152)	(914)	HXF1206-14-***	(3.2)
2000	120	9	17	8	35	HXF2108-17-***	8
	240	(229)	(432)	(203)	(889)	HXF2208-17-***	(3.6)
	480					HXF2408-17-***	
3000	240	10	23	9	35	HXF3209-23-***	13
	480	(254)	(584)	(229)	(889)	HXF3409-23-***	(5.9)
4000	240	12	29	11	35	HXF4211-29-***	15
	480	(305)	(737)	(279)	(889)	HXF4411-29-***	(6.8)
5000	240	13	35	12	31	HXF5212-35-***	18
	480	(330)	(889)	(305)	(787)	HXF5412-35-***	(8.2)
6000	240	14	40	13	25	HXF6213-40**	22
	480	(356)	(1016)	(330)	(635)	HXF6413-40**	(10)

HXFL 系列 L 型圓盤平面鐵弗龍(PTFE) 加熱器

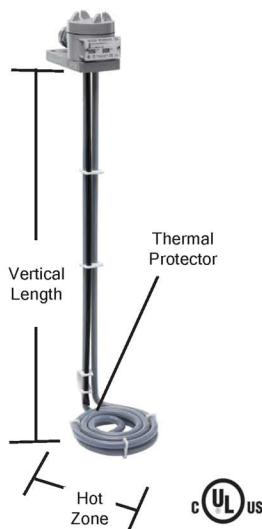

WATTS	VOLTS	HOT ZONE In.(mm)	STD. VERT. LENGTH* In.(mm)	DIA. In.(mm)	MAX. COLD ZONE In.(mm)	MODEL NUMBER	SHIP WGT. Lbs.(kg)
500	120	5	12	5	36	HXFL.5105-R***	6
	240	(127)	(305)	(127)	(914)	HXFL.5205-R***	(2.7)
1000	120	6	12	6	36	HXFL1106-R***	7
	240	(152)	(305)	(152)	(914)	HXFL1206-R***	(3.2)
2000	120	8	18	8	35	HXFL2108-R***	8
	240	(203)	(457)	(203)	(889)	HXFL2208-R***	(3.6)
	480					HXFL2408-R***	
3000	240	9	18	9	35	HXFL3209-R***	13
	480	(229)	(457)	(229)	(889)	HXFL3409-R***	(5.9)
4000	240	11	18	11	35	HXFL4211-R***	15
	480	(279)	(457)	(279)	(889)	HXFL4411-R***	(6.8)
5000	240	12	18	12	31	HXFL5212-R***	18
	480	(305)	(457)	(305)	(787)	HXFL5412-R***	(8.2)
6000	240	13	18	13	25	HXFL6213-R***	22
	480	(330)	(457)	(330)	(635)	HXFL6413-R***	(10)

集安電工有限公司 [www.atapowtech.com](http://www.atapowtech.com)

TEL: 886-3-3666021 FAX: 886-3-3626423