


# HXOL, HXSL 系列軟管式鐵弗龍 Fluoropolymer 加熱器

具有卓越的耐化學腐蝕性  $10\text{w/in}^2(1.5\text{w/cm}^2)$

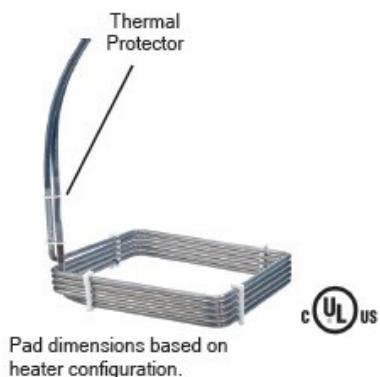

## HXOL 系列軟管式鐵弗龍 (PTFE) 加熱器

WATTS	VOLTS	WIDTH In./(mm)	LENGTH In.(mm)	MODEL NUMBER	SHIP WGT. Lbs.(kg)
1000	120	2	11	HXOL1102-11L**	6
	240	(50)	(280)	HXOL1202-11L**	(2.5)
1000	120	4	8	HXOL1104-08L**	6
	240	(100)	(205)	HXOL1204-08L**	(2.5)
2000	120	4	13	HXOL2104-13L**	7
	240	(100)	(330)	HXOL2204-13L**	(3.5)
	480	(100)	(330)	HXOL2404-13L**	(3.5)
2000	120	5	10	HXOL2105-10L**	7
	240	(125)	(255)	HXOL2205-10L**	(3.5)
	480	(125)	(255)	HXOL2405-10L**	(3.5)
2000	120	6	8	HXOL2106-08L**	7
	240	(155)	(205)	HXOL2206-08L**	(3.5)
	480	(155)	(205)	HXOL2406-08L**	(3.5)
3000	240	4	18	HXOL3204-18L**	12
	480	(100)	(460)	HXOL3404-18L**	(5.5)
3000	240	5	12	HXOL3205-12L**	12
	480	(125)	(305)	HXOL3405-12L**	(5.5)
3000	240	6	11	HXOL3206-11L**	12
	480	(155)	(280)	HXOL3406-11L**	(5.5)
3000	240	8	8	HXOL3208-08L**	12
	480	(205)	(205)	HXOL3408-08L**	(5.5)
4000	240	5	18	HXOL4205-18L**	14
	480	(125)	(460)	HXOL4405-18L**	(6.5)
4000	240	6	14	HXOL4206-14L**	14
	480	(155)	(355)	HXOL4406-14L**	(6.5)
4000	240	8	11	HXOL4208-11L**	14
	480	(205)	(280)	HXOL4408-11L**	(6.5)
5000	240	6	18	HXOL5206-18L**	17
	480	(155)	(460)	HXOL5406-18L**	(8)
5000	240	8	13	HXOL5208-13L**	17
	480	(205)	(330)	HXOL5408-13L**	(8)
5000	240	9	11	HXOL5209-11L**	17
	480	(230)	(280)	HXOL5409-11L**	(8)
5000	240	10	10	HXOL5210-10L**	17
	480	(255)	(255)	HXOL5410-10L**	(8)
6000	240	7	18	HXOL6207-18L**	20
	480	(180)	(460)	HXOL6407-18L**	(9)
6000	240	8	15	HXOL6208-15L**	20
	480	(205)	(380)	HXOL6408-15L**	(9)
6000	240	9	13	HXOL6209-13L**	20
	480	(230)	(330)	HXOL6409-13L**	(9)
6000	240	10	12	HXOL6210-12L**	20
	480	(255)	(305)	HXOL6410-12L**	(9)
6000	240	11	11	HXOL6211-11L**	20
	480	(280)	(280)	HXOL6411-11L**	(9)

## HXSL 系列軟管式鐵弗龍 (PTFE) 加熱器

WATTS	VOLTS	WIDTH In./(mm)	LENGTH In.(mm)	MODEL NUMBER	SHIP WGT. Lbs.(kg)
1000	120	-	-	HXSL1**	6
	240	-	-	HXSL1**	(2.5)
2000	120	-	-	HXSL2**	7
	240 480	-	-	HXSL2**	(3.5)
3000	240	-	-	HXSL3**	12
	480	-	-	HXSL3**	(5.5)
4000	240	-	-	HXSL4**	14
	480	-	-	HXSL4**	(6.5)
5000	240	-	-	HXSL5**	17
	480	-	-	HXSL5**	(8)
6000	240	-	-	HXSL6**	20
	480	-	-	HXSL6**	(9)

集安電工有限公司 [www.atapowtech.com](http://www.atapowtech.com)

TEL:886-3-3666021 FAX:886-3-3626423